

— TAKE A LOOK AT METAL-X





OUR METAL-X COLLECTION CONSISTS OF 5 DESIGNS



DESIGN: URBAN
DESIGN CODE: 567
COLOUR: 38



DESIGN: URBAN BRICK
DESIGN CODE: 568
COLOUR: 50



DESIGN: GEO
DESIGN CODE: 569
COLOUR: 40



DESIGN: ARCHI
DESIGN CODE: 570
COLOUR: 50



DESIGN: CONSTRUCT
DESIGN CODE: 571
COLOUR: 40

—


ALL DESIGNS ARE AVAILABLE IN 7 COLOURS



—

colour_23


LRV 34

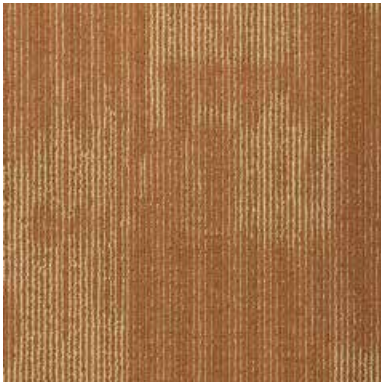

—

colour_38

LRV 18

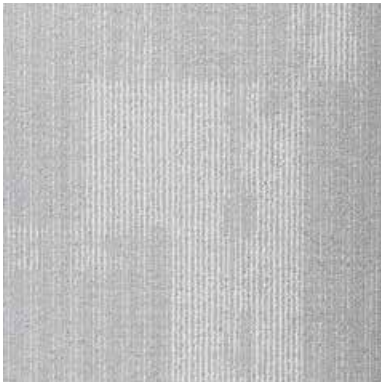

—

colour_40

LRV 29



—

colour_47


LRV 21



—

colour_48


LRV 24

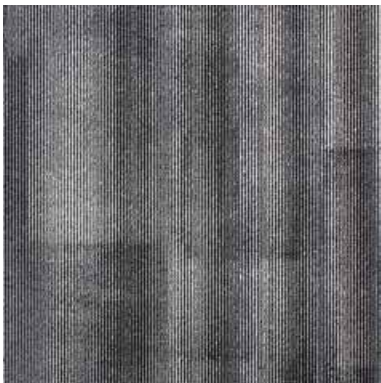

—

colour_50

LRV 15

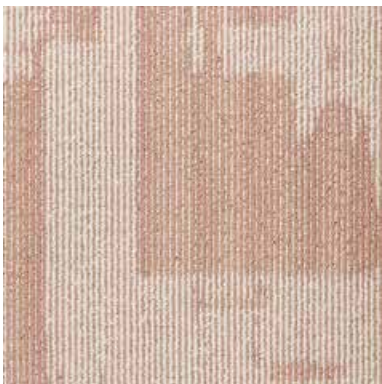

—

colour_84

LRV 29

INSPIRED BY METALLIC EFFECTS AND URBAN DESIGNS, METAL-X SETS A NEW PLAYGROUND FOR INTERIOR DESIGNERS.



THE METAL-X COLLECTION IS A PERFECT FIT FOR ANY HIGH-END COMMERCIAL AND HOSPITALITY ENVIRONMENT.



METAL-X IS A TRULY ARTISTIC FLOORING CONCEPT THAT USES SUSTAINABLE ECONYL® YARN IN A TECHNICALLY SUPERIOR FINISH.




EXPLORE A NEW WORLD OF INFINITE REGENERATION

We are proud to announce that a large percentage of our Myriad-made collections is manufactured from **100% sustainable ECONYL® BCF yarn**. ECONYL® yarn is a **100% regenerated and regenerable** fibre made from pre- and post-consumer Nylon 6 waste materials.



IMPROVE YOUR ROOM ACOUSTICS THANKS TO SOUNDBLOC

As a textile, carpet is a natural sound absorber and reduces impact noise while absorbing sound within the space. All our qualities have **sound absorbing properties** and **reduce impact noise**. Several collections even reach the α_w 0,35 threshold, **reducing sound up to 50%**.

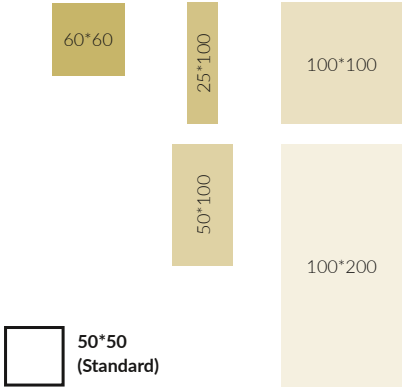

SPECIAL TILE SIZES FOR PROJECTS BIGGER THAN 200M²

At INCATI we emphasize the importance of this **modular flooring trend**. For projects **exceeding 200m²**, **special tile sizes** are made available in both bitumen or soundblock backing : 60/60 – 25/100 – 50/100 – 100/100 – 100/200

Technical details

Geo - Construct - Archi - Urban - Urban Brick


Manufacturing type	Herstellungsart	Mode fabrication	Productie methode	tufted 1/10"		
Construction	Struktur	Structure	Structuur	structured loop pile		
Pile composition	Polmaterial	Couche d'usure	Poolsamenstelling	100% PA - Econyl®		
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed		
Primary backing	Trägermaterial	Premier dossier	Tuftdoek	polyester fleece		
Secondary backing	Rückenausrüstung	Dossier	Rug	bitumen with glass fibre scrim		
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m²	800 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m²	4.450 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	4,5 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	7,0 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m²	190.000 (+/-)
Size	Abmessung	Dimension	Afmeting		cm	50 x 50
Packing	Verpackung	Emballage	Verpakking		20 per box	5 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307	33	heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307	LC 2	
Castor chair	Stuhlrolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985	A	intensive
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986	≤ 0,2%	
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1	Bfl-S1	loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≥ 10 ¹⁰
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W	0,069
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,15
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	26 dB
				ISO 10140	ΔL	42 dB (1000 Hz)
Colour fastness light	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02	≥ 8	
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12	≥ 5	

CE
16

DOP 000578T-001

EN1307

for use as floorcovering in buildings (EN 14041) according to the manufacturer's specification



ECONYL®
ENDLESS POSSIBILITIES

SDN
solution dyed nylon
Klench, Alpacas, angora



These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. We reserve the right to alter specifications without notice. Due to the method of manufacture, perfect pattern/colour matching cannot be guaranteed. Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability. It is not considered as a manufacturing fault.

Uitgave: 07/2020

— THANK YOU FOR YOUR INTEREST IN OUR METAL-X COLLECTION.

For more information, please contact us
via sales@incati.be or **+32 11 80 48 50**
or visit our website www.incati.be



ARCHI - 570-48