

— TAKE A LOOK AT MYRAGE



OUR MYRAGE COLLECTION CONSISTS OF 8 DESIGNS



DESIGN: CARAT
DESIGN CODE: 547
COLOUR: 50



DESIGN: CLAUDIA
DESIGN CODE: 548
COLOUR: 50



DESIGN: SPARTA
DESIGN CODE: 549
COLOUR: 51



DESIGN: LEGEND
DESIGN CODE: 559
COLOUR: 32




DESIGN: PARADE
DESIGN CODE: 561
COLOUR: 55



DESIGN: SCULPTURE
DESIGN CODE: 563
COLOUR: 55



DESIGN: STRATOS
DESIGN CODE: 564
COLOUR: 60

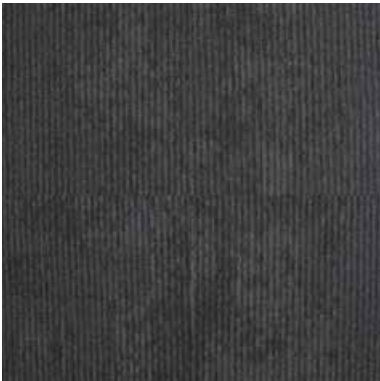


DESIGN: CONCRETE
DESIGN CODE: 577
COLOUR: 51

ALL DESIGNS ARE AVAILABLE
IN 9 COLOURS



colour_32

LRV 9

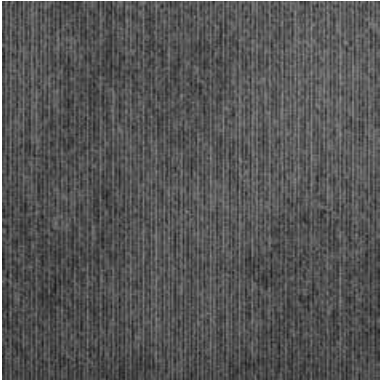


colour_50

LRV 9



colour_51

LRV 8

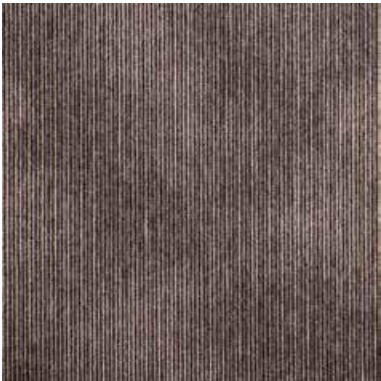

colour_52

LRV 9



colour_55

LRV 4



colour_60

LRV 7



colour_61

LRV 7



colour_62



LRV 4



colour_70

LRV 8

—
**INSPIRED BY THE LATEST DESIGN
TRENDS AND TECHNICAL POSSIBILITIES,
INCATI CREATED A NEW MODULAR
FLOORING CONCEPT FOR INTERIOR
DESIGNERS IN MYRAGE.**

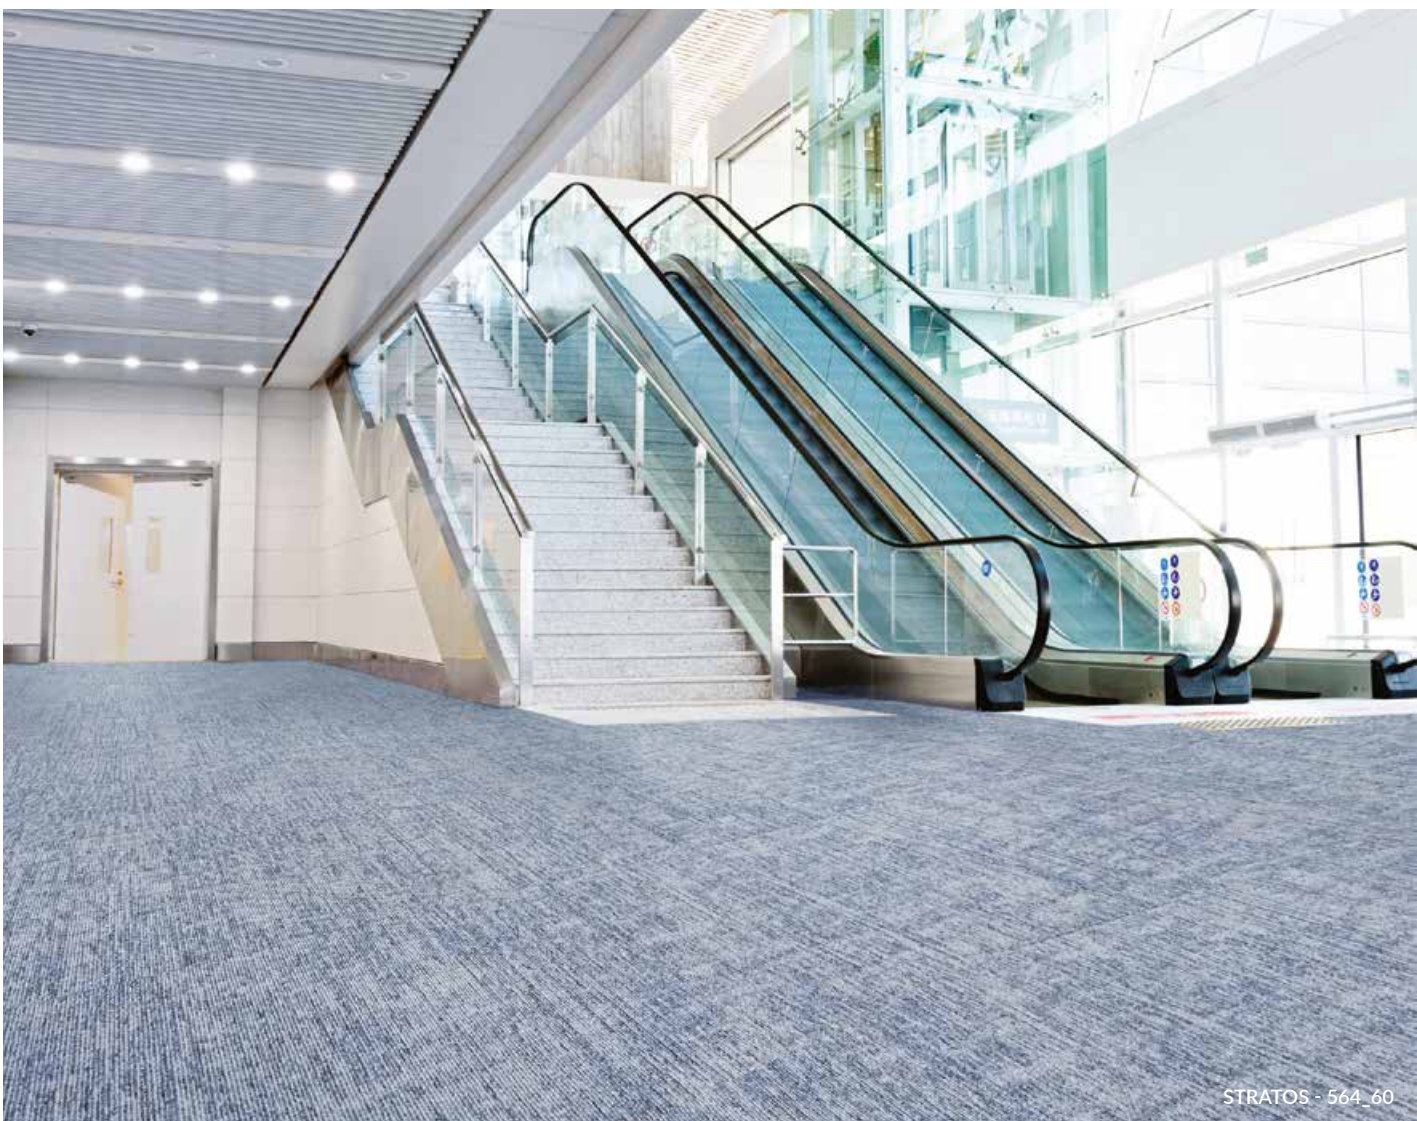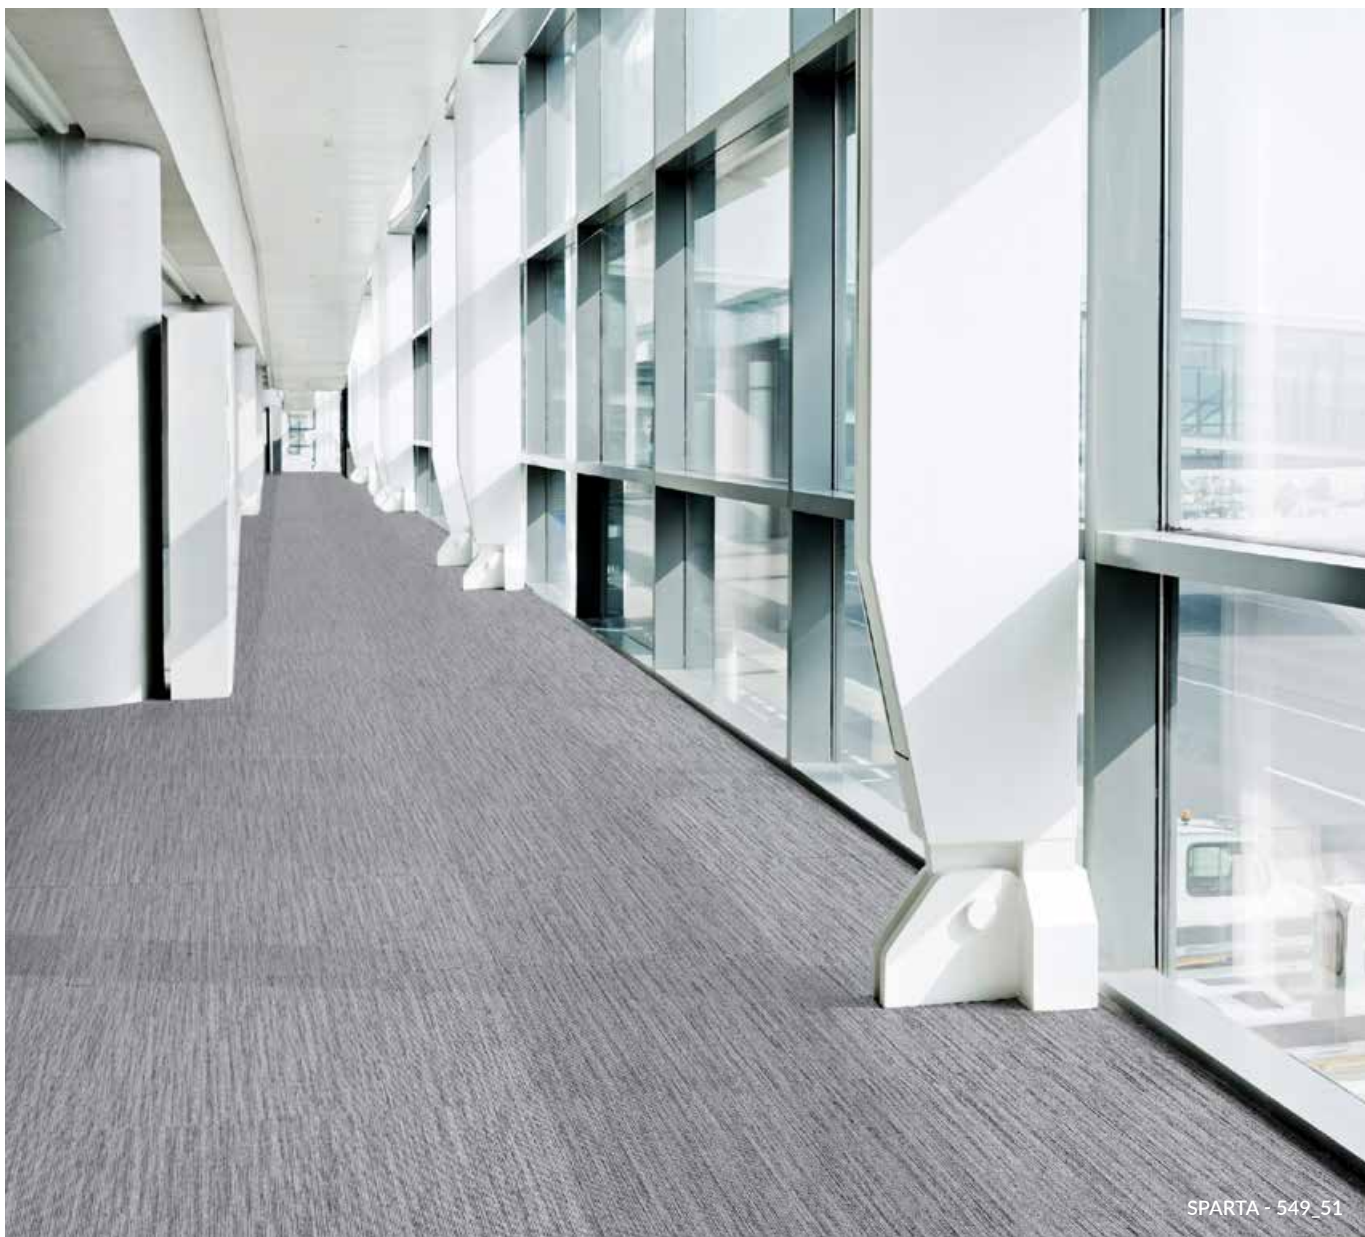


**MYRAGE IS A PERFECT FIT FOR
ANY HIGH-END COMMERCIAL
ENVIRONMENT THAT
DEMANDS A UNIQUE IDENTITY.**

MYRAGE IS A TRULY ARTISTIC FLOORING CONCEPT THAT USES 100% SOLUTION DYED NYLON YARN FOR STAIN-RESISTANCE AND COLOUR-FASTNESS IN A TECHNICALLY SUPERIOR FINISH.



IMPROVE YOUR ROOM ACOUSTICS THANKS TO SOUNDBLOC

As a textile, carpet is a natural sound absorber and reduces impact noise while absorbing sound within the space. All our qualities have **sound absorbing properties** and **reduce impact noise**. Several collections even reach the α_w 0,35 threshold, **reducing sound up to 50%**.

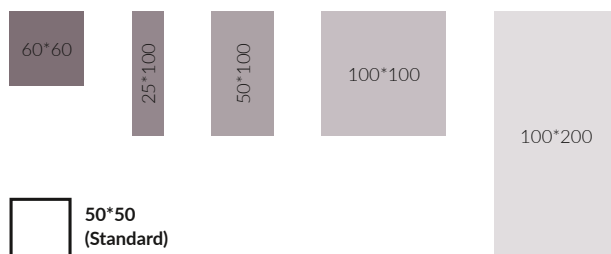


SPECIAL TILE SIZES FOR PROJECTS BIGGER THAN 200M²

At INCATI we emphasize the importance of this **modular flooring trend**. For projects **exceeding 200m²**, **special tile sizes** are made available in both bitumen or soundblock backing : 60/60 – 25/100 – 50/100 – 100/100 – 100/200

Technical details

Carat - Claudia - Concrete - Legend - Parade - Sculpture - Sparta - Stratos

Manufacturing type	Herstellungsart	Mode fabrication	Productie methode	tufted 1/10"		
Construction	Struktur	Structure	Structuur	structured loop pile		
Pile composition	Polmaterial	Couche d'usure	Poolsamenstelling	100% PA 6 BCF		
Dye method	Farbgestaltung	Coloration	Kleurverwerking	solution dyed		
Primary backing	Trägermaterial	Premier dossier	Tuftdoek	polyester fleece		
Secondary backing	Rückenausrüstung	Dossier	Rug	bitumen with glass fibre scrim		
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m²	680 (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m²	4.450 (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	3,8 (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	6,8 (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m²	180.000 (+/-)
Size	Abmessung	Dimension	Afmeting		cm	50 x 50
Packing	Verpackung	Emballage	Verpakking			20 per box 5 m²
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		33 heavy commercial
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		LC 1
Castor chair	Stuhllolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		A intensive
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		≤ 0,2%
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		Bfl-S1 loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	≤ 2,0
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	≤ 10⁹
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m²/K/W	0,066
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α _w	0,15
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL _w	25 dB
				ISO 10140	ΔL	42 dB (1000 Hz)
Colour fastness light	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		≥ 6
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijfechtheid	ISO 105 X12		≥ 4-5

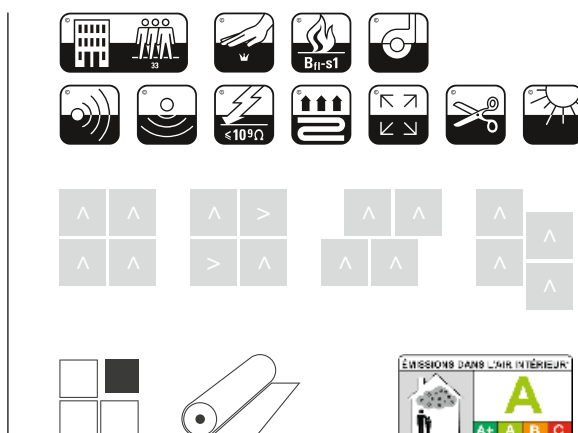

THANK YOU FOR YOUR INTEREST IN OUR MYRAGE COLLECTION.

For more information, please contact us
via sales@incati.be or **+32 11 80 48 50**
or visit our website www.incati.be

